


IT-DP5

Elettropompe sommergibili Submersible electropumps


COLORI DISPONIBILI - Available colours

ACCIAIO / Steel


TIPO - TYPE		Hp	kW	AMPERE				m³/h l./min.												
1~ V.230 - Hz 50 - 60	3~ V.230/400 - Hz 50-60			1~ 230 V	μF	3~ 230 V	400 V		0	0,6	1,2	1,8	2,4	3	3,6	4,2	4,8	5,4	6	
IT-DP5 100/50 M	IT-DP5 100/50 T	0,5	0,37	2,70	16	1,90	1,00	H (mt)	37	35	33	30	28	27	23	19	15	14	10	
IT-DP5 100/75 M	IT-DP5 100/75 T	0,75	0,55	4,15	20	2,41	1,38		51	50	48	44	40	35	31	27	232	19	14	
IT-DP5 100/100 M	IT-DP5 100/100 T	1	0,75	5,20	20	3,30	1,85		62	59	56	51	45	39	35	30	26	21	18	
IT-DP5 100/150 M	IT-DP5 100/150 T	1,5	1,1	6,75	30	4,37	2,55		71	69	65	60	54	52	46	40	34	27	21	
IT-DP5 100/200 M	IT-DP5 100/200 T	2	1,5	8,65	35	5,85	3,30		93	90	88	80	75	66	59	50	41	33	23	
IT-DP5 100/300 M	IT-DP5 100/300 T	3	2,2	12,85	45	9,08	5,25		105	102	98	93	86	75	69	62	54	48	35	

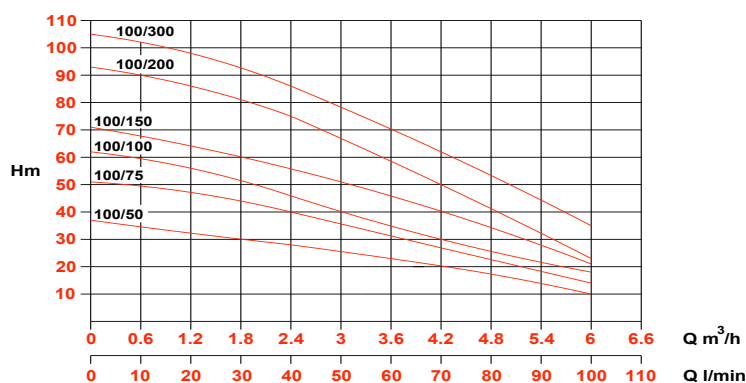


TIPO - TYPE	No. ST	H mm		Kg	
		1~	3~	1~	3~
IT-DP5 100/50	3	505	505	12,2	11,2
IT-DP5 100/75	4	538	538	13,2	12,5
IT-DP5 100/100	5	605	571	14,8	13,0
IT-DP5 100/150	6	638	638	16,4	15,1
IT-DP5 100/200	8	755	704	19,5	17,0
IT-DP5 100/300	9	788	788	21,1	19,7

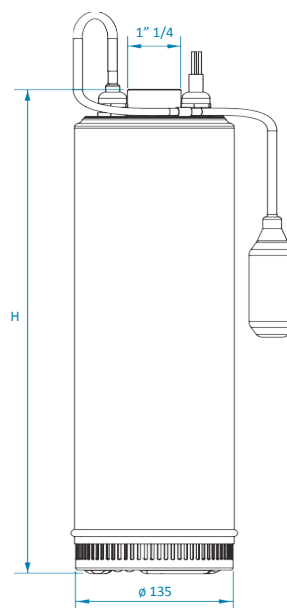


TIPO - TYPE		Hp	kW	AMPERE				m³/h l./min.												
1~ V.230 - Hz 50 - 60	3~ V.230/400 - Hz 50-60			1~ 230 V	μF	3~ 230 V	400 V		0	1,8	2,4	3	3,6	4,2	4,8	5,4	6	6,6	7,2	8,4
IT-DP5 140/75 M	IT-DP5 140/75 T	0,75	0,55	4,15	20	2,41	1,38	H (mt)	29	26	25	24	23	22	21	20	18	17	15	12
IT-DP5 140/100 M	IT-DP5 140/100 T	1	0,75	5,20	20	3,30	1,85		43	40	39	38	37	35	32	30	28	25	23	18
IT-DP5 140/150 M	IT-DP5 140/150 T	1,5	1,1	6,75	30	4,37	2,55		55	51	49	46	44	43	40	37	34	32	28	23
IT-DP5 140/200 M	IT-DP5 140/200 T	2	1,5	8,65	35	5,85	3,30		68	62	59	57	55	52	50	46	43	41	36	28
IT-DP5 140/300 M	-	3	2,2	12,85	45	-	-		84	78	76	73	70	67	63	58	54	50	45	33
-	IT-DP5 140/300 AT	3	2,2	-	-	9,08	5,25		97	89	85	81	78	75	72	67	63	58	53	42

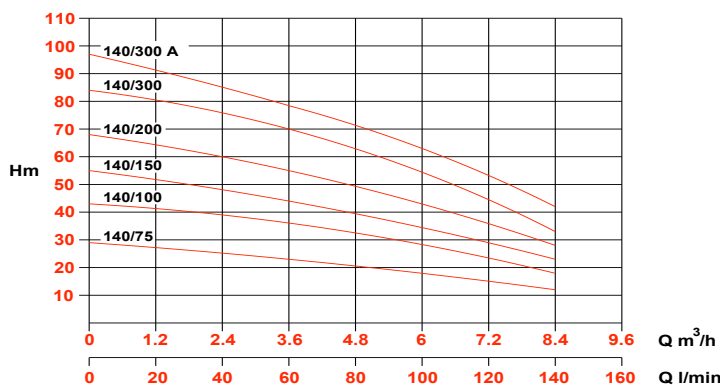

TIPO - TYPE	No. ST	H mm		Kg	
		1~	3~	1~	3~
IT-DP5 140/75	2	472	472	12,5	11,8
IT-DP5 140/100	3	538	505	14,1	12,7
IT-DP5 140/150	4	571	571	15,7	14,4
IT-DP5 140/200	5	655	605	18,4	16,0
IT-DP5 140/300	6	688	-	20,1	-
IT-DP5 140/300 A	7	-	721	-	19,0

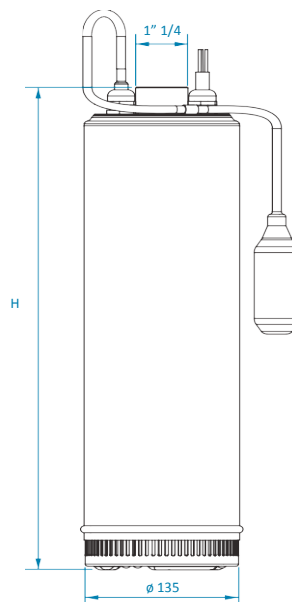

TIPO - TYPE		Hp	kW	AMPERE				m³/h l./min.												
1~ V.230 - Hz 50 - 60	3~ V.230/400 - Hz 50-60			1~ 230 V	μF	3~ 230 V	400 V		0	1,8	2,4	3	3,6	4,2	4,8	5,4	6	6,6	7,2	8,4
IT-DP5 220/100 M	IT-DP5 220/100 T	1	0,75	5,20	20	3,30	1,85	H (mt)	0	40	60	80	100	120	140	150	160	180	200	220
IT-DP5 220/150 M	IT-DP5 220/150 T	1,5	1,1	6,75	30	4,37	2,55		30	28	27	26	25	24	22	21	20	18	14	10
IT-DP5 220/200 M	IT-DP5 220/200 T	2	1,5	8,65	35	5,85	3,30		45	41	39	37	34	31	28	26	25	21	18	13
IT-DP5 220/200 M	-	2	1,5	8,65	35	5,85	3,30		58	54	52	50	48	44	40	37	34	29	22	16
IT-DP5 220/300 M	-	3	2,2	12,85	45	-	-		72	66	63	59	55	50	44	41	39	33	27	21
-	IT-DP5 220/300 AT	3	2,2	-	-	9,08	5,25	89	81	77	73	68	63	56	53	51	43	36	26	

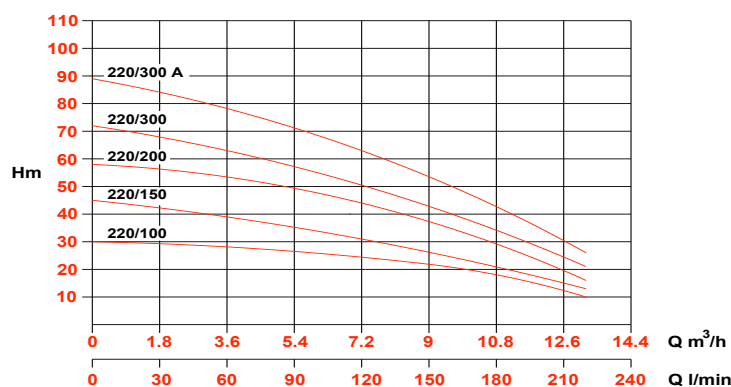

TIPO - TYPE	No. ST	H mm		Kg	
		1~	3~	1~	3~
IT-DP5 220/100	2	505	472	13,7	12,4
IT-DP5 220/150	3	538	538	15,4	14,0
IT-DP5 220/200	4	621	571	18,1	15,6
IT-DP5 220/300	5	655	-	19,7	-
IT-DP5 220/300 A	6	-	688	-	18,7

